


la belle CL Targa 2



la belle CL Targa 2




- three colour type options are available
- moisture-protected sound converter
- simple assembly
- fits almost any model of spectacles
- ideally suited to open ear application
- a modern, timeless design
- mono, stereo, CROS, BiCROS and IROS versions available
- indicated for slight to moderate or severe hearing loss
- right or left ear versions
- takes 312 type batteries
- fully digital
- 2 channels
- 3 programmes (signal tones when selecting programme)
- separate AGCi
- broadband AGCo
- MPO
- FDRC technology
- feedback control
- adjustable cut-off frequency
- Audio Matic start-up delay system (to suppress feedback when switching on)
 - can be activated or de-activated
- on/off switch using programme selection button
- module cold bendable

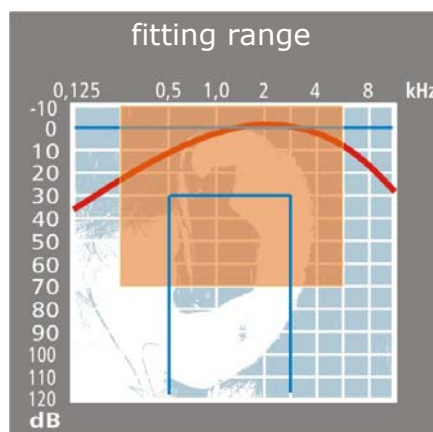

technical data

		DIN EN 60118-0	DIN EN 60118-7
Maximum sound output level SPL L_{Amax}	(db)	132	125
Acoustical max.	(dB)	56	50
Frequency range	(Hz)	<100 - 7000	
Operating current	(mA)	0.8	

please turn on

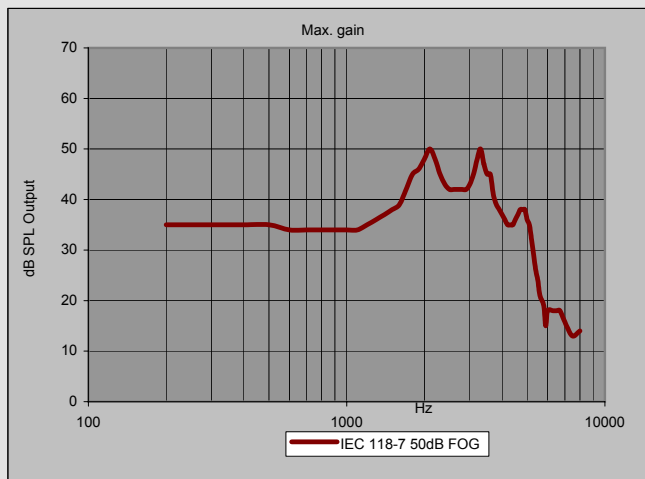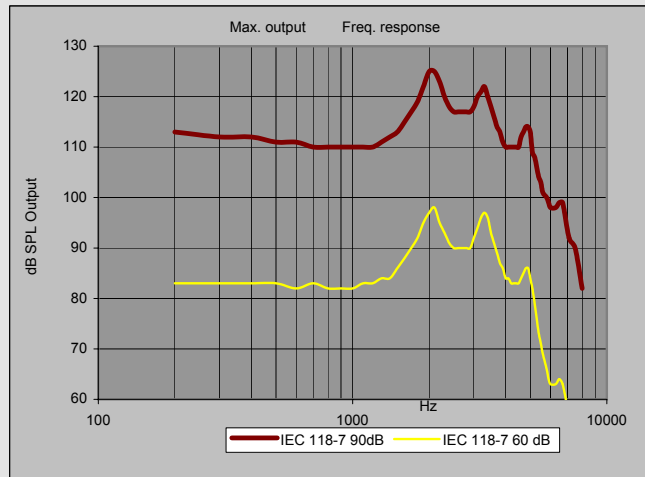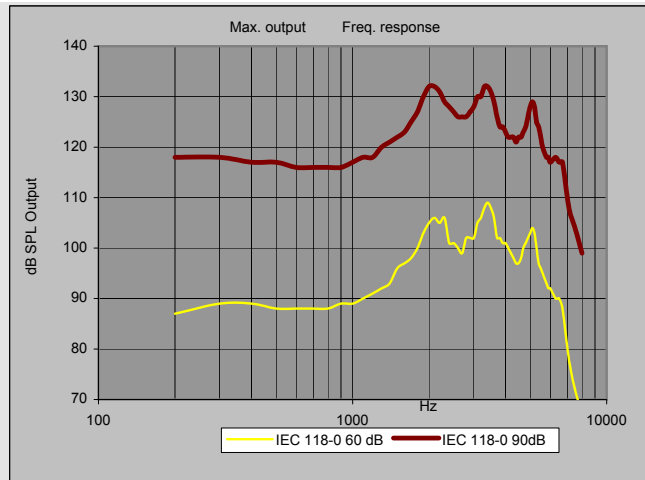

Programming:

CONNEXX with Audiofit, Siemens programming cable, recognised as la belle Targa 2

Technical change without prior notice