


la belle

la belle 420

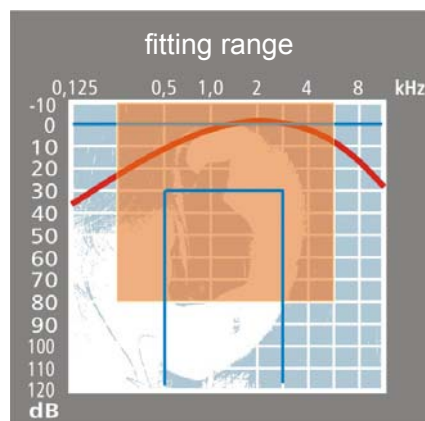




la belle 420

- BTE-module for eyeglasses
- module cold bendable
- digital hearing-system
- 4 programmes selected by push button
- 4-channel WDRC
- Dynamic Contrast Detection
- 12-band gain adjustment
- 2-microphone technology with fixed or automatic directionality
- MPO
- adaptive feedback cancellation (until -22dB)
- layered noise reduction
- programme tones and battery tones
- battery type 312
- colours: gold-brown, silver-black, anthracite-black
- mono, stereo, CROS

Technical data

		DIN EN 60118-0	DIN EN 60118-7
OSPL90 L_{Amax}	(dB)		124
Gain 50dB(FOG) max.	(dB)		52
Frequency range	(Hz)		200-6500
Equivalent input noise	(dB)		23
Operating current	(mA)		1,4

please turn over

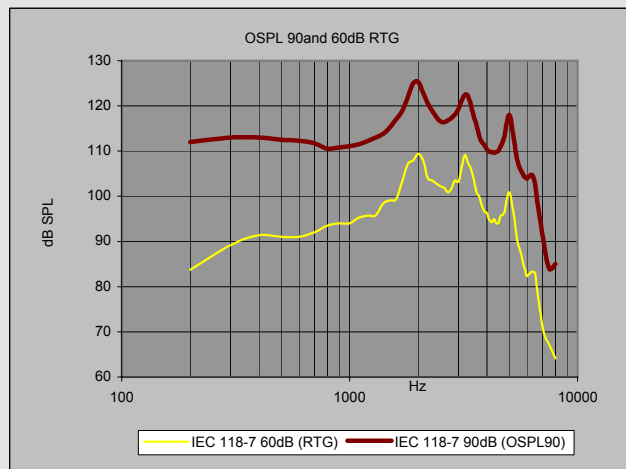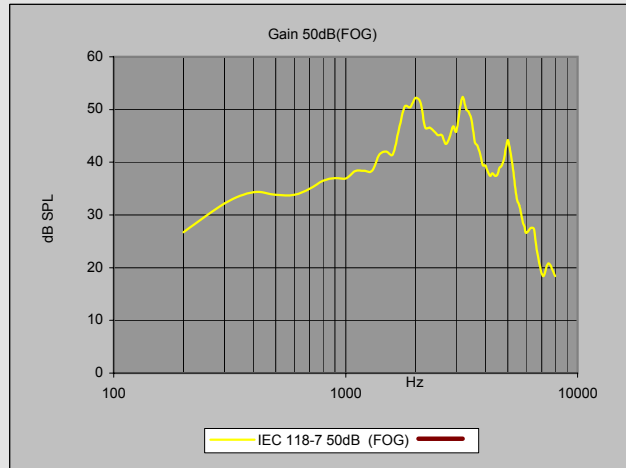

Before programming, please remove the device cover plate

Programming:

with Bruckhoff fitting software and Siemens programming cable (Connexx cable grey)

Technical changes without prior notice